


# *ROSE*

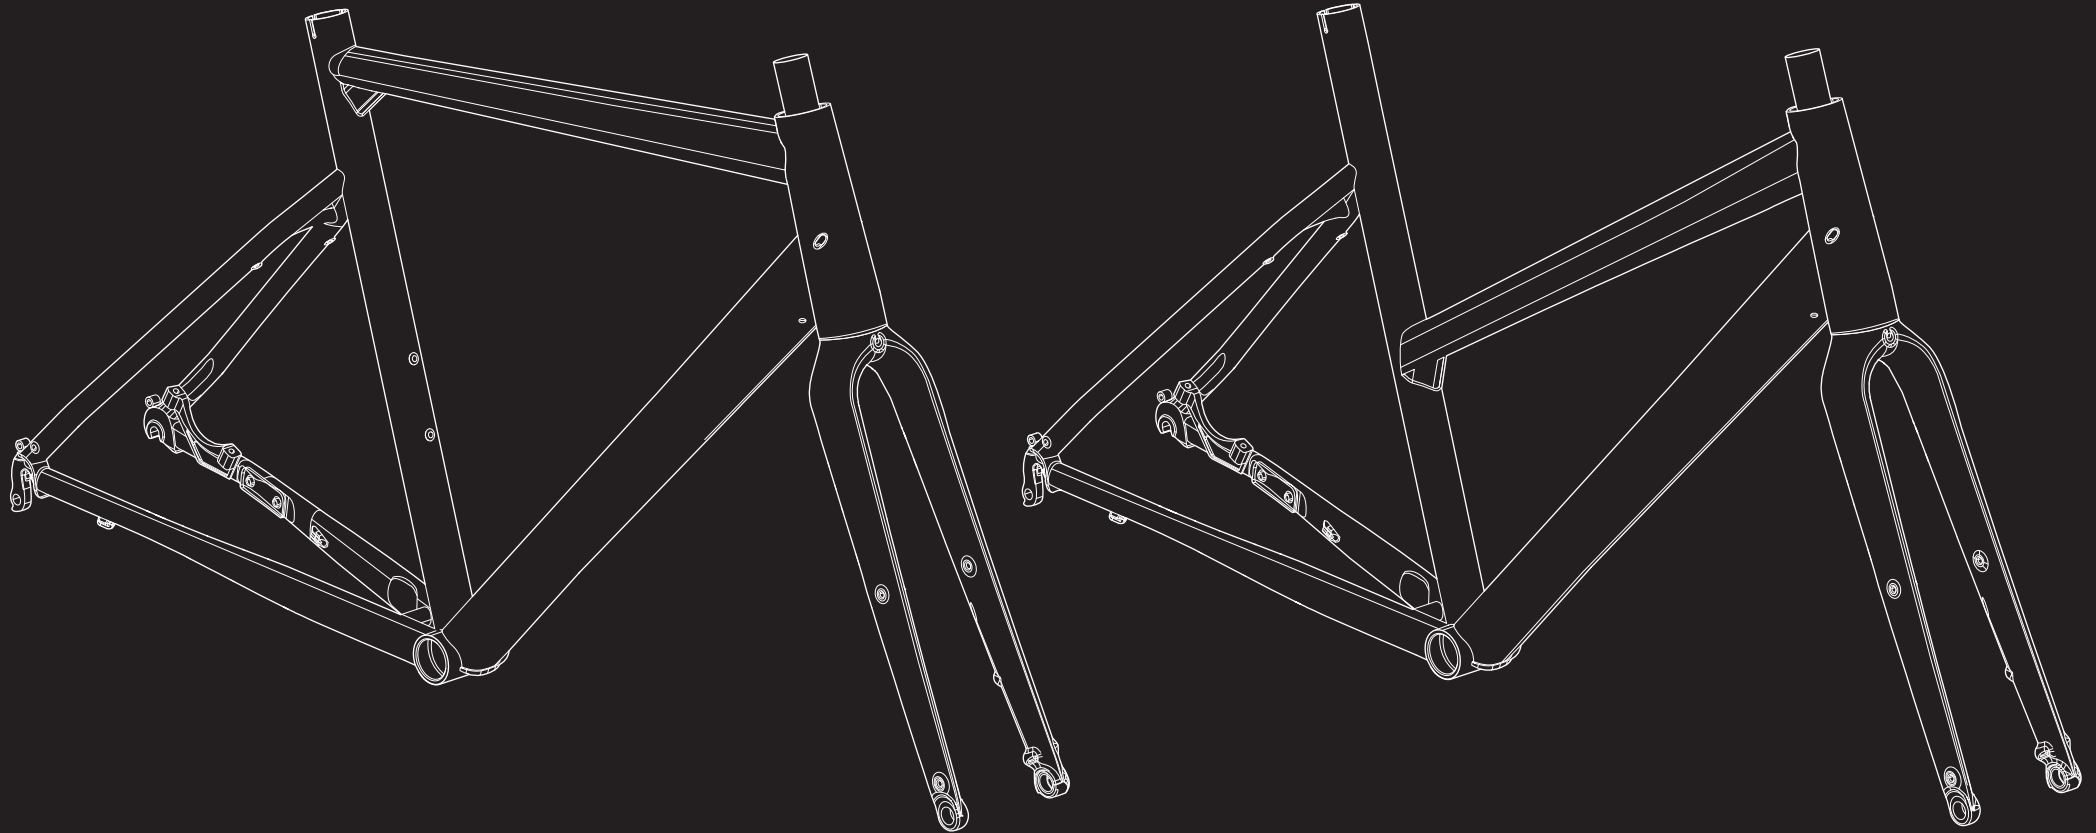

**ANY QUESTIONS?**

[technik@rosebikes.com](mailto:technik@rosebikes.com)


ROSE Bikes GmbH  
Schersweide 4  
46395 Bocholt, Germany

## *MULTI STREET*

**FRAME DETAILS**  
MODEL YEAR 2020

# MULTI STREET


## FRAME DETAILS MENS

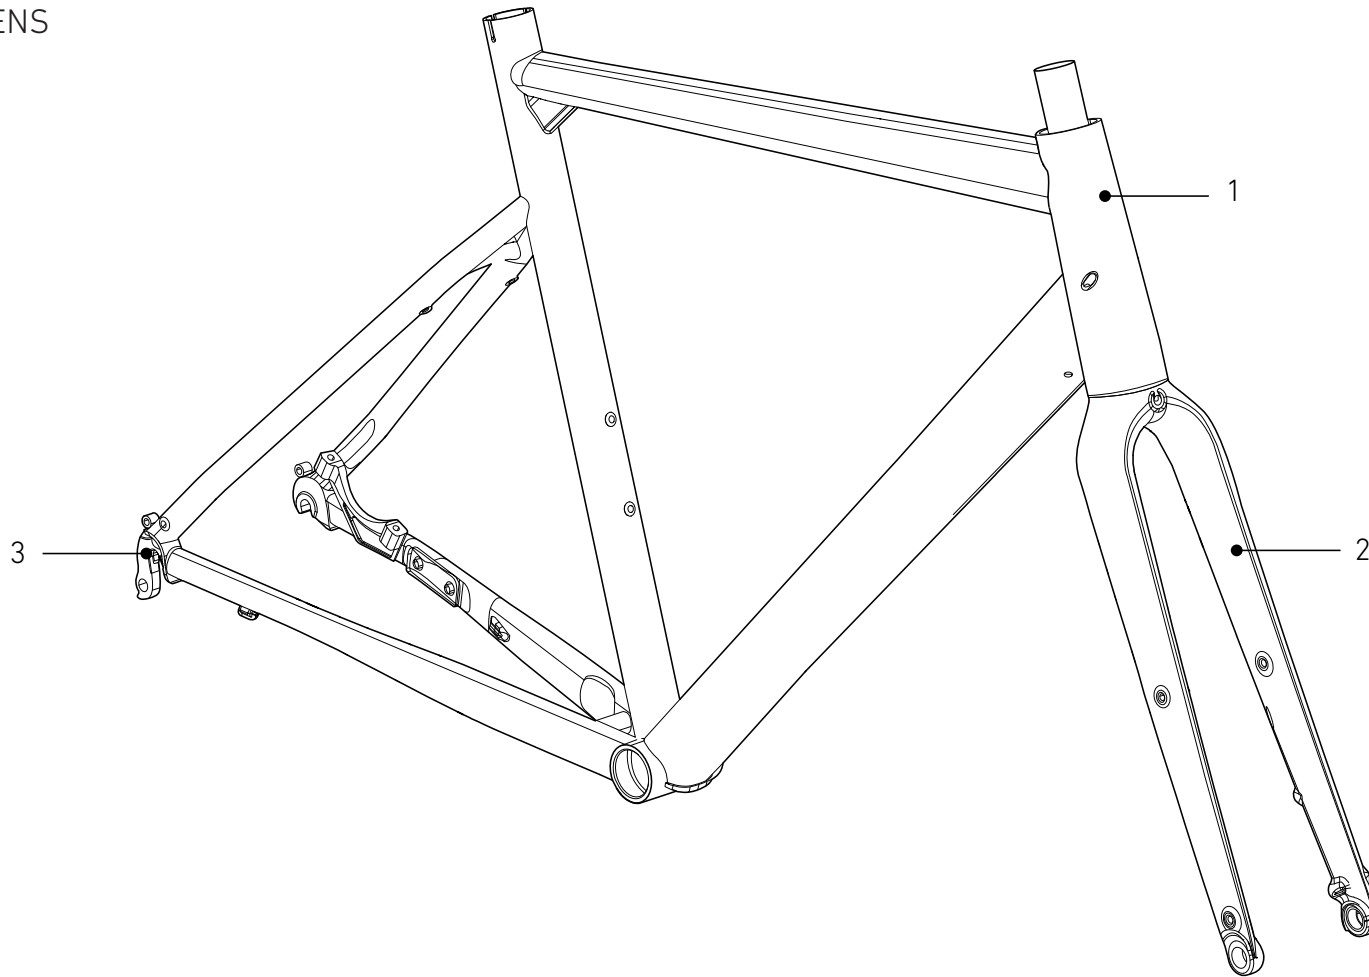

POS	DESCRIPTION	SPECIFICATIONS	ART. NR.
1	frame	color: matt-black/shiny-grey/shiny-red	2270815
		color: matt-grey/shiny-white/fluo-yellow	2270816
2	fork	color: matt-black/shiny-grey/shiny-red	2270856
		color: matt-grey/shiny-white/fluo-yellow	2270857
3	rear derailleur		227553301

# MULTI STREET


## FRAME DETAILS LADIES

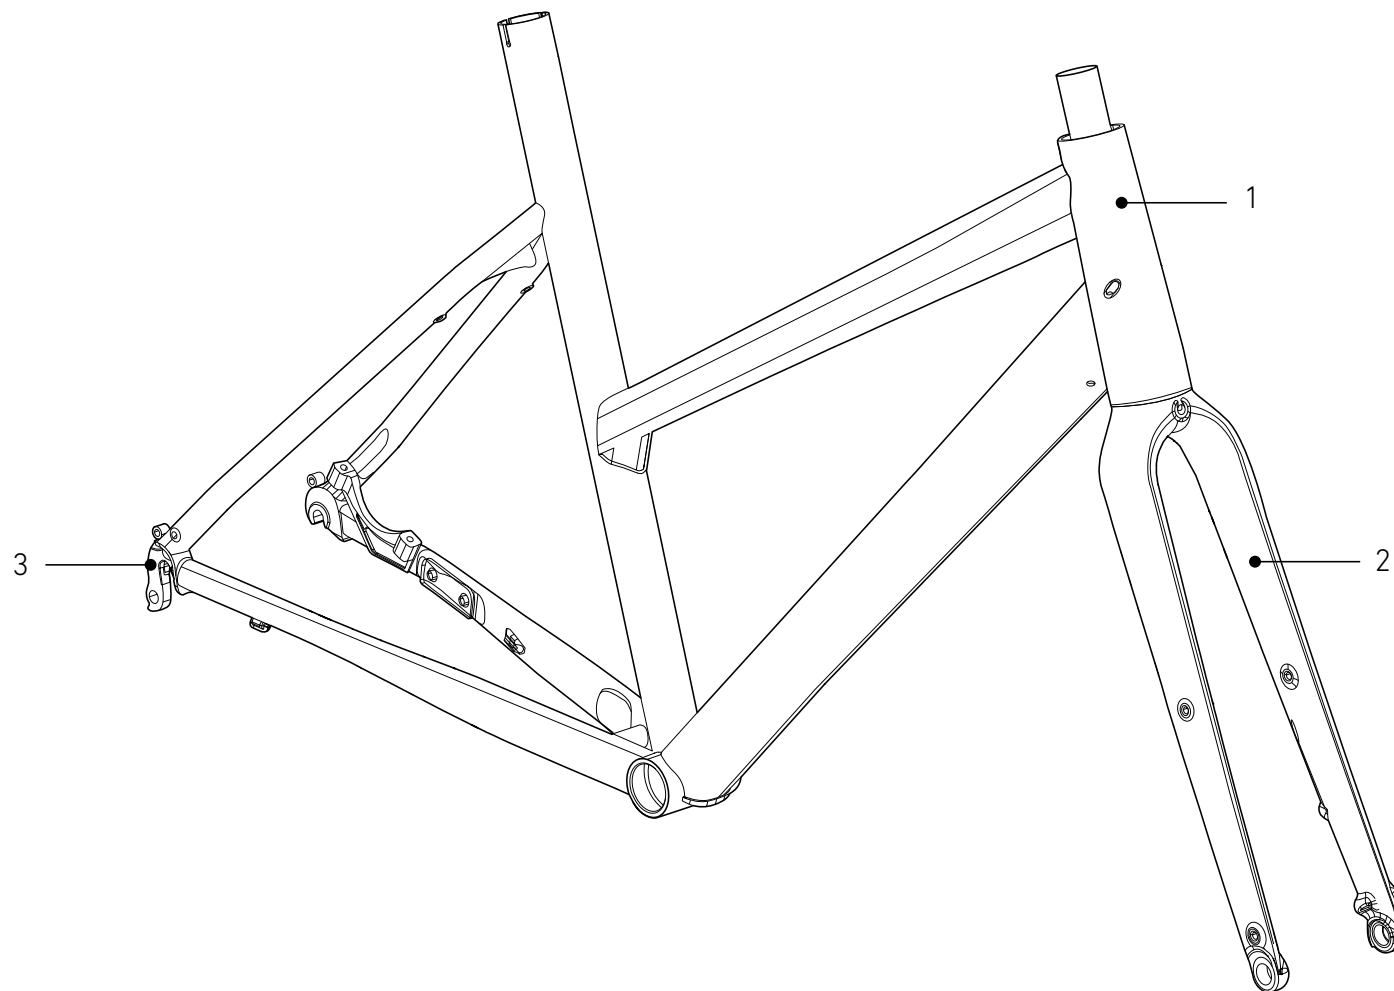

POS	DESCRIPTION	SPECIFICATIONS	ART. NR.
1	frame	color: matt-black/shiny-grey/shiny-red	2270817
		color: matt-grey/shiny-white/fluo-yellow	2270818
2	fork	color: matt-black/shiny-grey/shiny-red	2270856
		color: matt-grey/shiny-white/fluo-yellow	2270857
3	rear derailleur		227553301

# MULTI STREET

## FRAME DETAILS

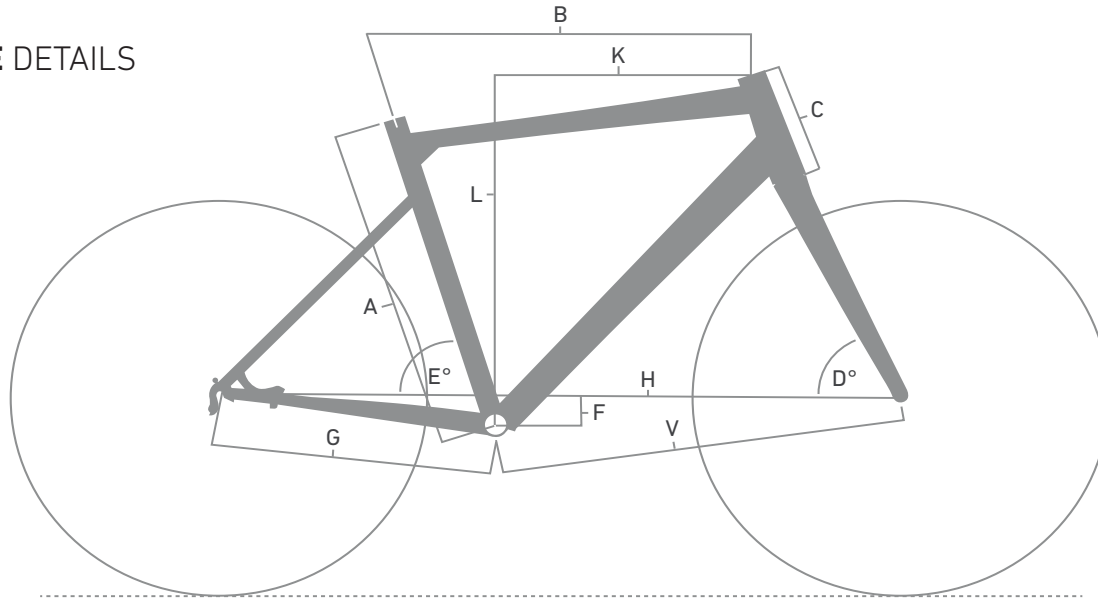

## FRAME INTERFACES

BOTTOM BRACKET	BSA 68
REAR WHEEL AXLE	135mm QR
REAR BRAKE MOUNT	160 mm PostMount
MAX Ø DISC	160 mm
Ø SEATPOST	31.6 mm
MAX. TIRE SIZE	38 mm
MAX. CHAINRING SIZE	48/36/26T
FRONT DERAILLEUR MOUNT	yes
BOTTLE CAGE	yes, Mens 2x / Ladies 1x
REAR RACK MOUNT	yes, max. load 8 kg per side

## FORK INTERFACES

FRONT WHEEL AXLE	12 x 100 mm Thru-axle
FRONT BRAKE MOUNT	FlatMount with Post-Mount Adapter - 160 mm
MAX Ø DISC	160 mm
MAX. TIRE SIZE	38 mm
LOWRIDER MOUNT	yes, max. load 7.5 kg per side

MAX SYSTEM WEIGHT (RIDER + BICYCLE + CLOTHING + GEAR + LUGGAGE): 130 KG

## FRAME GEOMETRY

		MENS 19"	MENS 21"	MENS 23"	MENS 25"	LADIES 17"	LADIES 19"	LADIES 21"
SEATTUBE LENGTH [MM]	A	480	534	584	635	432	480	534
TOPTUBE LENGTH HORIZONTAL [MM]	B	575	590	600	610	565	575	590
HEADTUBE LENGTH [MM]	C	165	185	205	225	175	175	195
HEAD TUBE ANGLE	D	70°	71°	72°		70°		71°
SEAT TUBE ANGLE	E	72.5°		72°		73°		
BB DROP [MM]	F	50				50		
REAR CENTER [MM] (CHAINSTAY LENGTH) [MM]	G	440				440		
WHEELBASE [MM]	H	1074.5	1080	1073.5	1088.5	1070	1080	1086
REACH [MM]	K	398	406	403	412	390	401	409
STACK [MM]	L	560	583	606.5	625.5	570	570	593
FRONT CENTER [MM]	V	639	644.5	638	653	635	645	650.5